




A15 WIDE - A15 FOCUS

A15 KIT LIST


CONFIGURATION

| A15 WIDE/A15 FOCUS | DESCRIPTION | A15_2F | A15_2W | A15_4F | A15_4W | A15_2W4F | A15_4W2F | A15_4W4F | A15_6W | A15_8W |
|-------------------------|---|--------|--------|--------|--------|----------|----------|----------|--------|--------|
| LA4X | Amplified controller with PFC 4 x 1000 W /8 Ohms. Ethernet network. AES/EBU. | 1 | 1 | 2 | 2 | 3 | 3 | 4 | 3 | 4 |
| L-CASE | 2U Electronics transport and protection case | 1 | 1 | 2 | 2 | 3 | 3 | 4 | 3 | 4 |
| A15 WIDE | 2-way passive constant curvature WST@ 30° enclosure: 15" LF+ 3" HF diaphragm | 0 | 2 | 0 | 4 | 2 | 4 | 4 | 6 | 8 |
| A15 FOCUS | 2-way passive constant curvature WST@ 10° enclosure: 15" LF + 3" HF diaphragm | 2 | 0 | 4 | 0 | 4 | 2 | 4 | 0 | 0 |
| A15-BUMP | Flying frame for vertical deployment of A15 and KS21 | 0 | 0 | 0 | 0 | 2 | 2 | 2 | 0 | 0 |
| A15-LIFT | Rigging element for horizontal deployment of A15 | 0 | 0 | 0 | 2 | 0 | 2 | 2 | 4 | 4 |
| A15-RIGBAR | Rigging bar and pullback for A15 and KS21 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| A-TILT | Rigging element for stacking A15 and A10 onto KS21 | 0 | 0 | 2 | 0 | 2 | 0 | 2 | 0 | 0 |
| A-MOUNT | Pole mount for A15 and A10 | 2 | 2 | 0 | 0 | 2 | 2 | 0 | 2 | 0 |
| KS21-OUTRIG | Stability bars for KS21 | 0 | 0 | 2 | 0 | 2 | 0 | 2 | 0 | 0 |
| CLAMP250 | Clamp certified for 250 kg | 0 | 0 | 0 | 0 | 2 | 0 | 0 | 0 | 0 |
| M-BAR | Extension bar for M-BUMP | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| X-BAR | Rigging bar for X series | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| LA-SLING2T | 1m chain sling with two-leg bridles rated 2 tons | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 2 |
| SP10 | Speaker cable: 4 x 4mm² NL4 10m length | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| SP25 | Speaker cable: 4 x 4mm² NL4 25m length | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 6 | 8 |
| SP.7 | Speaker cable: 4 x 4mm² NL4 0.7m length | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| SP-Y1 | Y split speaker cable: 2 x 2.5mm² NL4 1m length (with CC4FP adaptor) | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 6 | 8 |
| KS21 SYSTEM | DESCRIPTION | | | | | | | | | |
| KS21 | High power compact subwoofer: 1x21" | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 6 | 8 |
| KS21-PLA | Removable front dolly for 1KS21 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 6 | 8 |
| KS21-COV | Protective cover for 1KS21 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 6 | 8 |
| KS21-CHARIOT | Chariot for 3 KS21 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| KS21-CHARIOTCOV | Protective cover for 3 KS21 on KS21- CHARIOT | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| TRAINING | DESCRIPTION | | | | | | | | | |
| TRA-VOU1 | 1 day training valid for one participant | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 0 | 2 |
| SERVICE KIT A15 | DESCRIPTION | | | | | | | | | |
| G03407 | KR diaphragm 3" A15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| G03411 | KR compression driver 3" A15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| G03403 | KR loudspeaker 15" A15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| SERVICE KIT KS21 | DESCRIPTION | | | | | | | | | |
| G03409 | KR loudspeaker 21" KS21 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |


2 A15 Focus

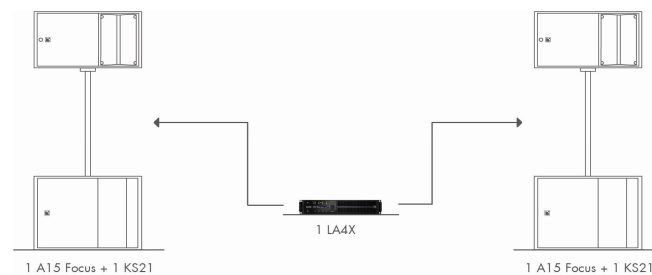


2 A15 Wide

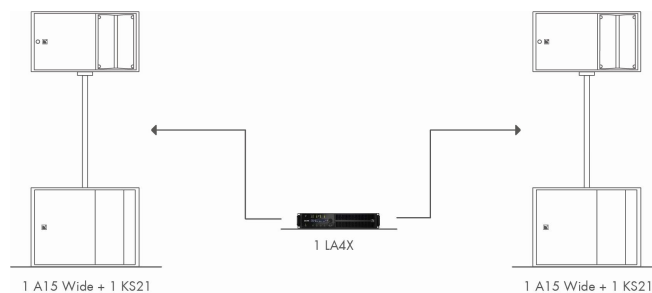


4 A15 Focus

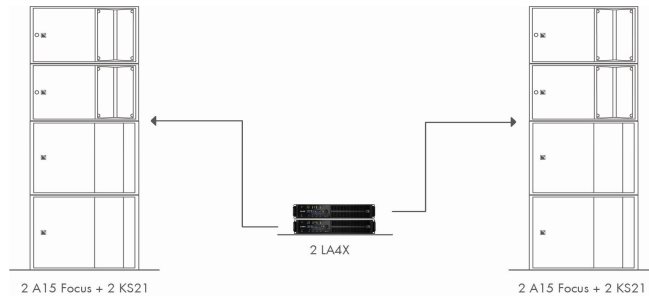


4 A15 Wide

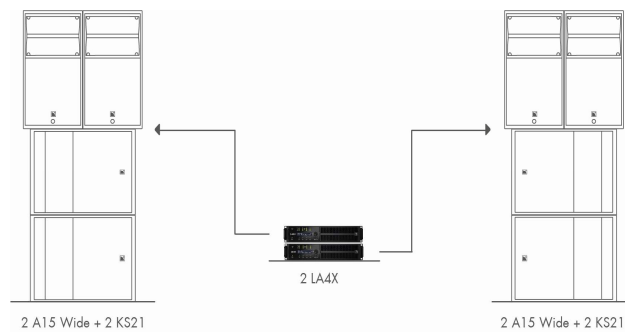


2 A15 Focus and 1 A15 Wide per side (vert)

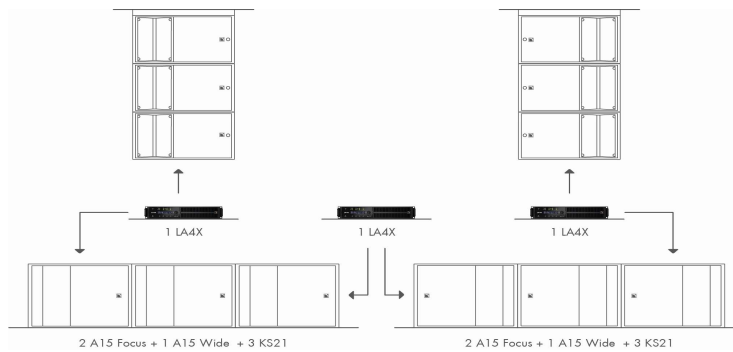


1 A15 Focus and 2 A15 Wide per side (vert)

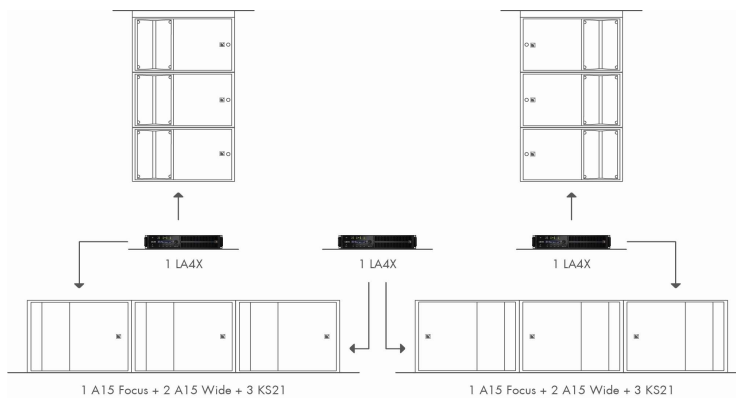

2 A15 Focus and 2 A15 Wide per side (vert)

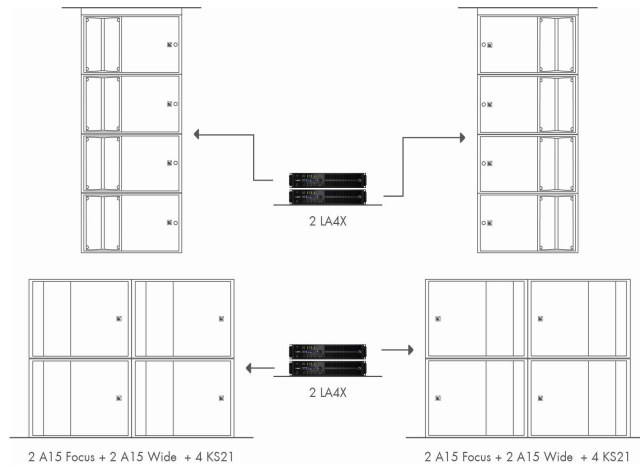

3 A15 Wide per side (radial)

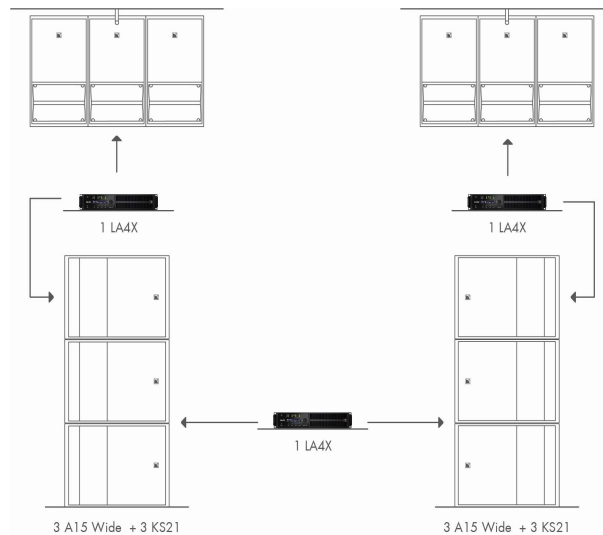

4 A15 Wide per side (radial)

