


Highlights:

- Stores up to 12 units of 19" Equipment
- Punched square holes for use with snap-in cage nuts
- Loading capacity of 160 Kg
- 2.5 mm thick cold rolled steel frame
- Easy assembly in 10 minutes
- Floor standing & wall mounted use
- Unrestricted air flow due to open-frame design
- Stand alone & in-furniture integration
- Ships as flat-down package

The OPR412 is a professional and solid constructed open-frame rack for 19" equipment compliant to ANSI/EIA RS-310D, DIN41491 and IEC60297 standards which is suitable for wall mounted or floor standing installation. It ensures maximum installation, connectivity and maintenance ease storing up to 12 units of 19" equipment. The open-frame rack has a depth of only 450 mm for easy installation in existing furniture. The rugged construction made of 2.5 mm thick steel allows pre-loading of the equipment before transportation to the installation site. Finishing is done in a black (RAL9004) powder coating with fine structure while punched equipment mounting profiles on front and both sides offer a multifunctional use of the cabinet. Delivered in a flat-down package, the simple structure allows assembly by a single person in a record-breaking time.

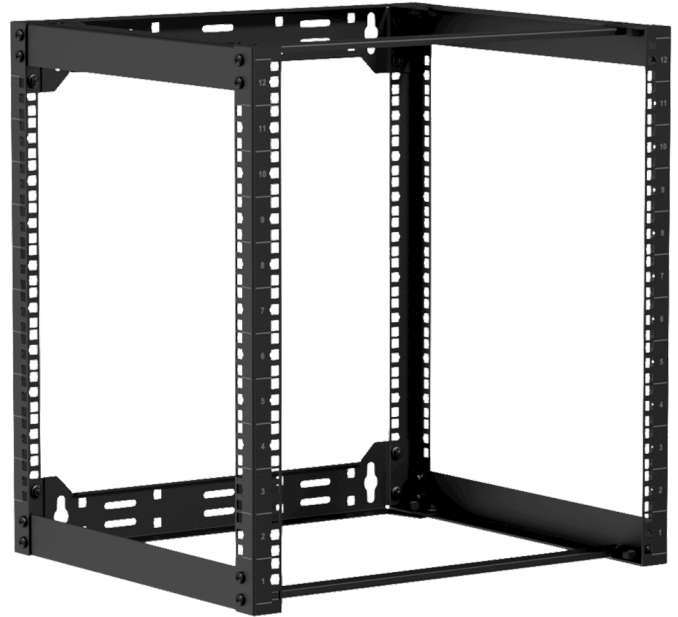



Product Features:

Unit height	12 HE
Max. usable depth	450 mm
Max. load standing	160 kg
Max. load hanging	80 kg
Dimensions	518 x 557.40 x 450 mm (W x H x D) (excl. rubber feet)
Weight	7.80 kg
Colours	Black (RAL9004)
Accessories	Included
	4 x Levelling feet
	4 x M8 expanding wall bolt
	24 x Cage nuts + screws

Architects' and Engineers' Specifications:

The rack shall be a 19" open frame rack type suitable for wall mounted and floor standing use which complies to ANSI/EIA RS-310D, DIN41491 and IEC60297 standards with 12 usable rackspaces. It shall have the following dimensions: height 557,40 mm, width 518 mm and depth 450 mm with a weight of 7,80 kg. The frame of the rack shall be constructed out of cold rolled steel with a thickness of 2.5 mm, while punched square holes for use with snap-in cage nuts shall be provided for fixation of the equipment. The finishing shall be done in a textured black powder coating (RAL9004) color and have printed unit measurement indicators. The rack shall ship unassembled as a flat-down package and provide a static load capacity of 160 kg. Fixation points for wall mounted use including expanding wall bolts and leveling feet for floor standing use shall be included.

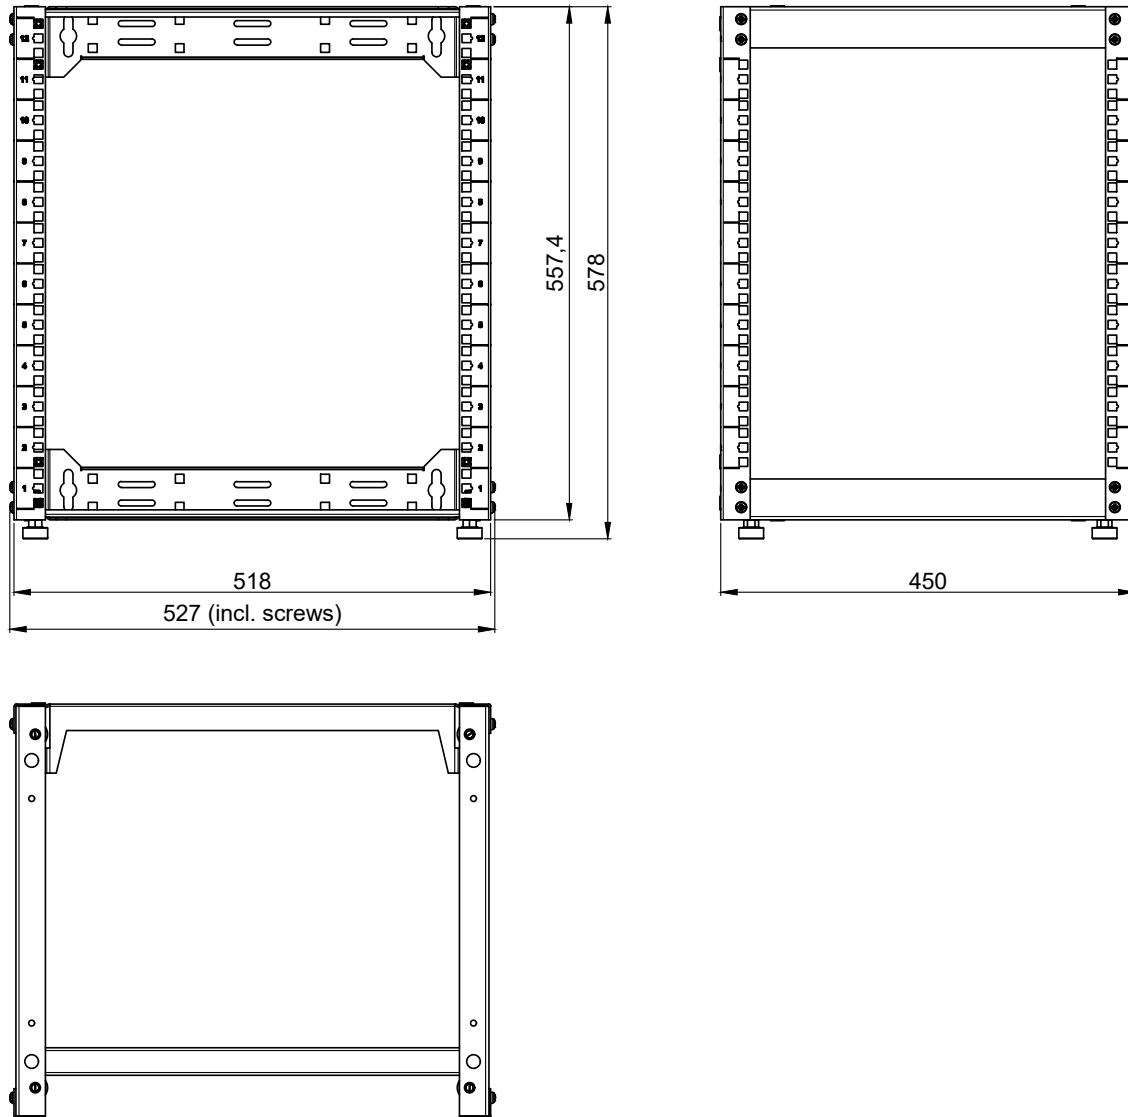

	OPR412		Product description: WALL MOUNTED 19" OPEN FRAME RACK - 12 UNIT - 450MM	
	Weight: 7,80 kg	Outer dimensions: (w x h x d) 527 x 578 x 450	Unit height: 12 HE	